

J4 RTS

Wired

RS485


Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The universal radio solution for external venetian blind.

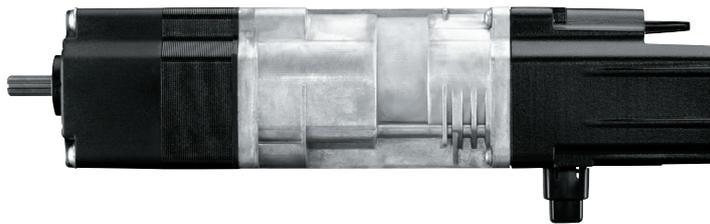

Applications



external
venetian blinds

Type 1, 2 and 3



• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

Main characteristics

- > The shortest EVB motor with radio embedded on the market
- > Safety stop (snow between slats, etc...) via a mushroom
- > 2D mushroom for protection in case of false / inversed installation
- > RTS embedded with Modulis, wind & sun protection functions compatibility
- > Electronic settings:
 - Bottom end-limit already set in factory
 - Automatic setting
 - All other settings via RTS transmitter
 - Easy double power cut
- > Easy integration:
 - Compatible with all type of head boxes
 - U or N headrail mounting
 - Fast connection (plug and play) with Hirschmann plugs
 - > Interoperability with Somfy RTS products
 - > Same integration process as J4 motor range


Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Electronic
Conformity	www.somfy.com/ce

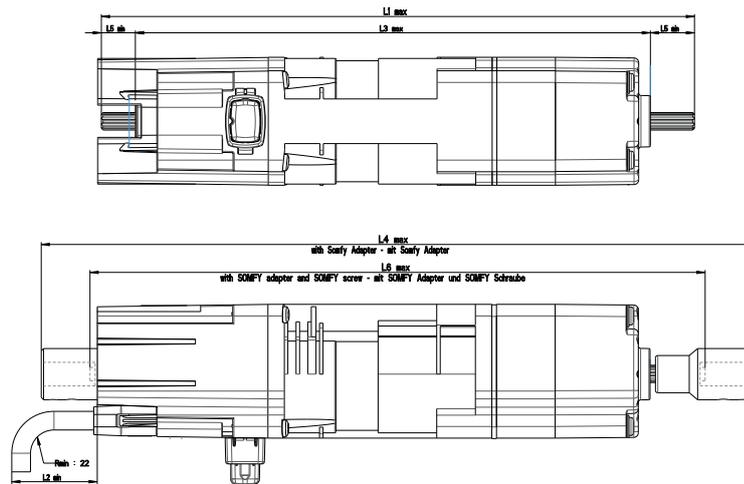


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Neutral	Blue
2	Active	Black
3	None	None
⏚	Earth	Green / Yellow